


# Installation Instructions

DUST COLLECTION SYSTEM FOR RIGHT ANGLE GRINDERS For **MORTAR RAKING/ TUCKPOINTING, CRACK CHASING AND DECORATIVE CONCRETE CUTTING**




**1** Remove the existing guard. Choose the mounting collar/plate that fits your grinder and slip it on the grinder's collar as shown. Tighten slightly, but leave it loose enough that you can rotate it.

**2** Screw on the arbor extender. You may also have to install one of the three black spacer washers, depending on the model of grinder. The idea is to have the blade centered inside the cutting port of the CutBuddie® II, with equal space on both sides of the blade.

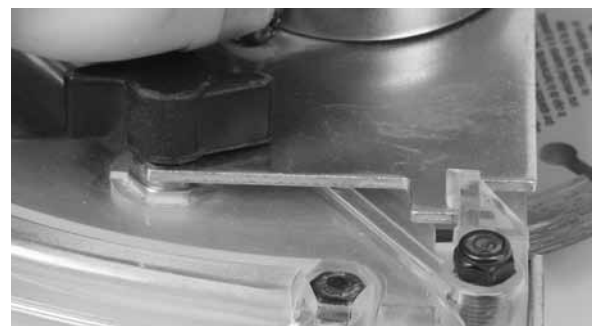

**3** Put the blade on the arbor extender and tighten the nut. Make sure it is centered properly and seated flat.

**4** Slide the CutBuddie® II shroud onto the mounting collar/plate as shown. Make sure the black wing nut bolts slide into the slots on the mounting plate/collar and the metal tab on the leading edge of the mounting collar/plate fits down, inside the bracket on the lead edge of the shroud.

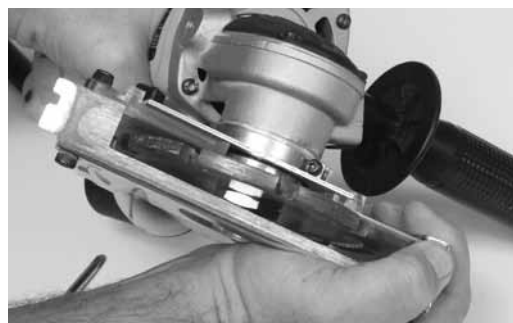


**5** Be sure both tabs and both wing nut slots are properly positioned before hand tightening the black wing nuts.

**6** Check to ensure the blade is centered, and hand rotate it to make sure it is not mounted crooked and rotates completely without coming in contact with any part of the CutBuddie® II. Adjust the position of the mounting collar/plate until it aligned properly, then securely tighten the two screws on both sides of the collar with a Phillips head screwdriver.



**7** The supplied rotating cuff adaptor screws onto the standard 12 foot crush proof hose that comes standard with Dustless Technologies vacuums and easily attaches to the swiveling port of the CutBuddie® II shroud.

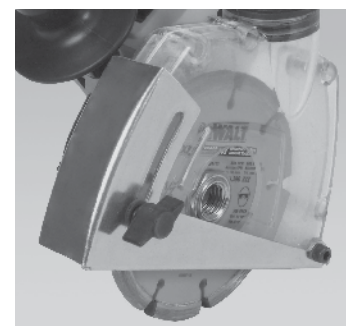

**8** Adjust the cutting depth with the wing nut on the depth gauge.